



Service Bulletin

Bulletin No. 2005-61
CMD 2005-01

Circulate to: Sales Manager Accounting Service Manager Technician Parts Manager

AIR INTAKE SUPPORT SCREEN

Models Affected


Application	Model	Serial No.
All	7.3L D-Tronic	All

Situation

The air intake support screen, (part number 853215), for the 7.3L D-Tronic diesel engine is no longer available (NLA) as a service part.

Solution

If this part requires replacement, it can be made to the specifications below from galvanized steel screen material.

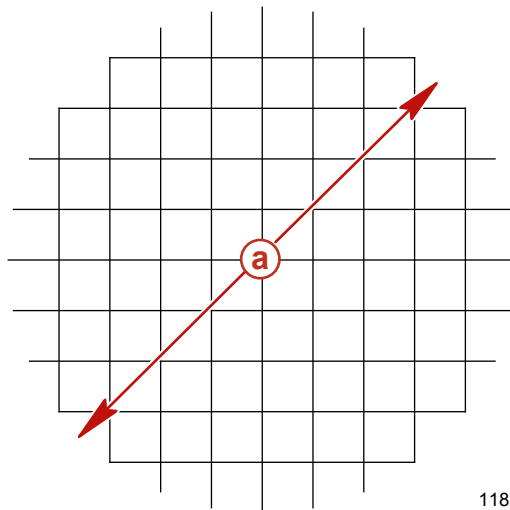

11823

1.15 mm (0.045 in) galvanized steel, 12.7 mm (1/2 in) mesh screen

a - 12.7 cm (5.0 inches) diameter

THE INFORMATION IN THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY COPYRIGHT AND IS THE PROPERTY OF MERCURY MARINE.

This document is provided for the sole and exclusive use of the original recipient as prescribed by Mercury Marine and may not be distributed or copied, digitally or otherwise, without the prior written consent of Mercury Marine.