
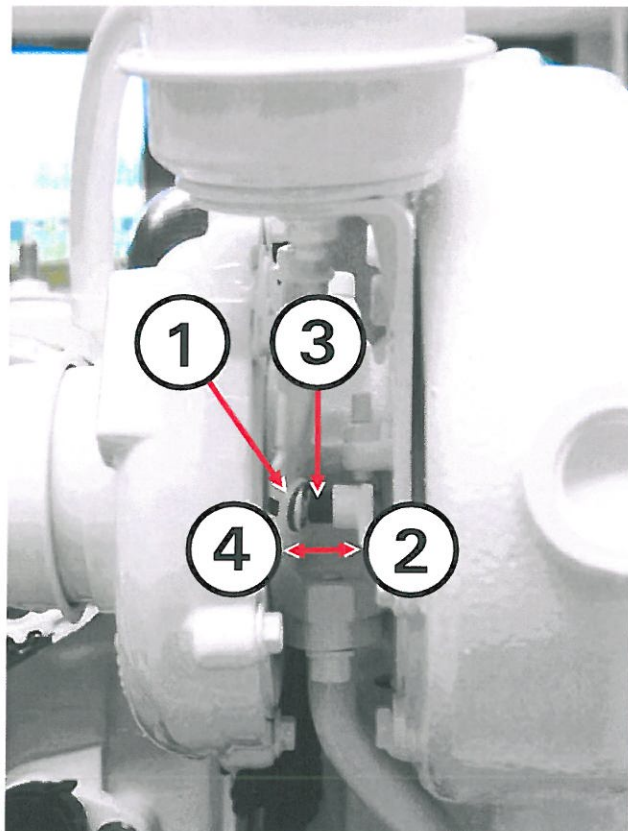


B 0.2 Engine, Installation, Attachments

Group	Number	Version
B 0.2	smc-08-82 vwm-08-02	01

Lubricating the turbocharger levers with grease (Klüberfett) on all 5-cylinder engines

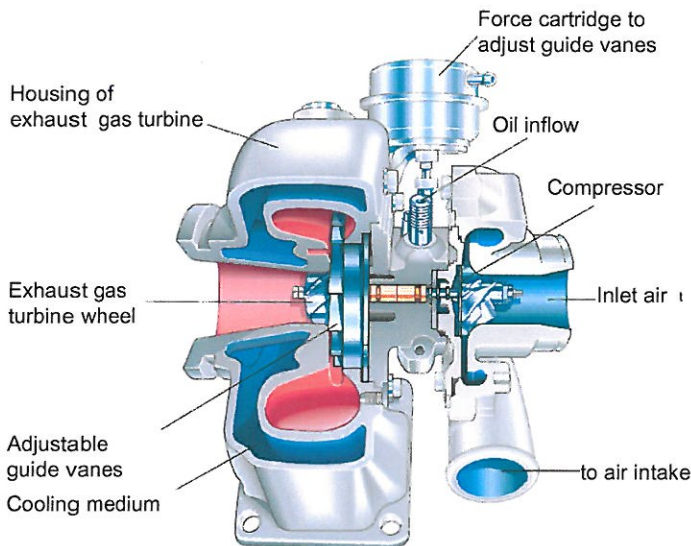

Please carry-out the following procedure to lubricate turbocharger levers with grease.

1. Loosen clip on shaft of turbocharger, don't remove it - Pos. 1 -
2. Move levers on lever shaft to side –Pos. 2-
3. Lubricate levers with grease (Klüberfett) - Pos. 3 -
4. Move back levers on lever shaft into the original position – Pos. 4 -
5. Lock clip into position to fix levers - Pos. 1 -

Note

Levers may not be completely removed from lever shaft, otherwise the spring-loaded membrane will act within the vacuum actuator.