


TO: PARTS MANAGER
SERVICE MANAGER

92-4

A. SILENT CHOICE EXHAUST SYSTEM

Before Ordering Silent Choice

Please make sure this system will fit in the boat before ordering it. Silent Choice can not be installed on engines that use 3 in. (76 mm) or 6 in. (152 mm) risers between the exhaust manifold and the exhaust elbow.

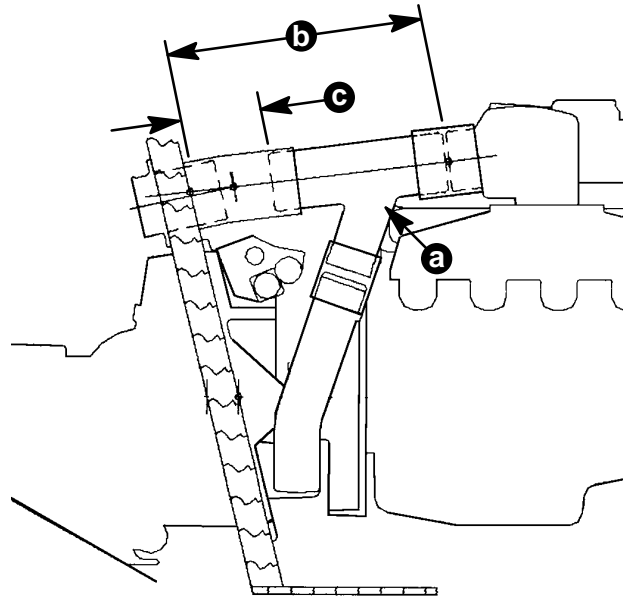

71313

- a - Silencer Valve(s)
- b - Approx. Measurement: 454/502 CID- 17-3/8 in. (441mm)
305/350 CID- 16-1/2 in. (419mm) (See NOTE)
- c - Approx. Measurement: 454/502 CID- 5-7/16 in. (138mm)
305/350 CID- 4-5/8 in. (117mm)

NOTE: PORT measurement add 29/32 in. (23mm).

Notice

Devices such as SILENT CHOICE are not legal in some states. The installer should check applicable state laws.

Parts Required

- 15786A2 Silencer Valve Kit (1 per engine)
- 16645A2 Pneumatic Air Pump (1 required for single or dual engines)
- 44266A6 Lower Exhaust Pipe Kit (1 per engine, if it now has thru transom exhaust. Not needed if engine has thru prop exhaust).
- 12648A2 Thru Transom Exhaust Kit (1 per engine, if it now has thru prop exhaust. Not needed if engine has thru transom exhaust)

OR

- 42-821188A1 Transom Mounted Muffler Tips (1 per engine, if it now has thru prop exhaust. Not needed if engine has thru transom exhaust)